

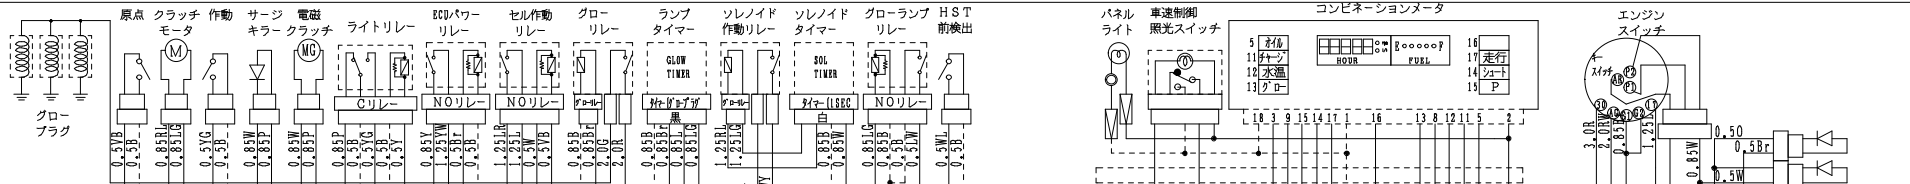


SW 2712(-S)  
(新コンビメータ)  
適用号機 14\*\*\*\*~

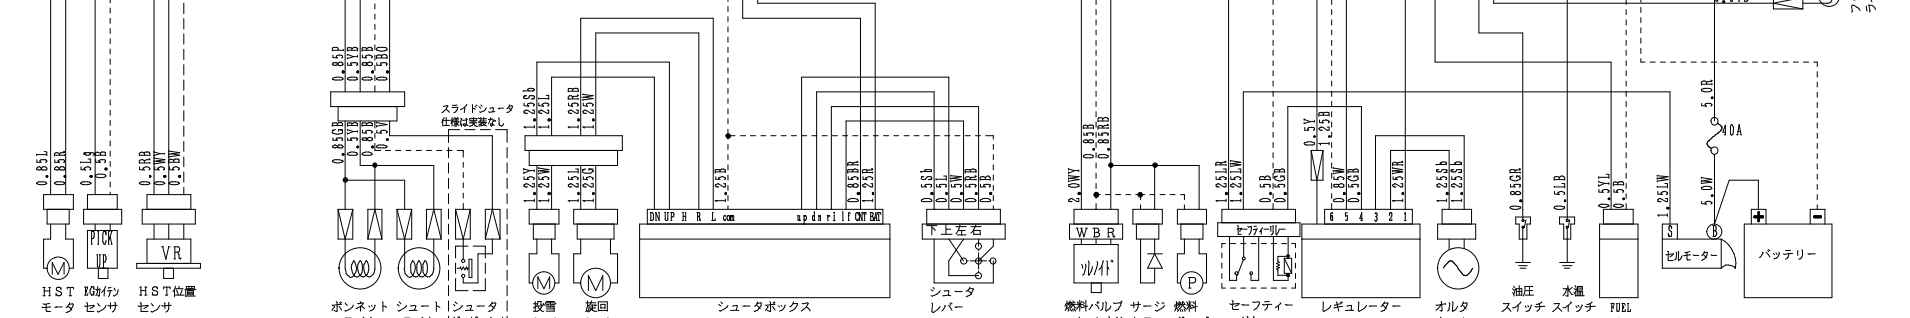

SW ECU

SIGNAL GND	CM1-1	0.25B
OUT-1 (Sink 5A)	CM1-2	0.85B
OUT-2 (Source 2A)	CM1-3	0.85RB
CONTROL POWER	CM1-4	0.85W
DRIVER POWER	CM1-5	0.85Y
M DRIVER1 CW	CM1-6	
M DRIVER1 CCW	CM1-7	
IN-1	CM1-8	
ANALOG IN-6	CM1-9	
ANALOG IN-7	CM1-10	
OUT-3 (Sink 0.3A)	CM1-11	
OUT-4 (Sink 0.3A)	CM1-12	0.5WY
OUT-5 (Sink 0.3A)	CM1-13	
Rz Data (YTE)	CM1-14	
Tz Data (YTE)	CM1-15	0.5RL
IN-2	CM1-16	
IN-3 CONTROL MONI	CM1-17	0.5WL
IN-4 CONTROL MONI	CM1-18	
IN-5 CONTROL MONI	CM1-19	
OUT-6 (Source 1A)	CM1-20	0.5BR
IN-6	CM1-21	0.5RW
IN-7	CM1-22	0.5PY
IN-8	CM1-23	0.5Lg
IN-9	CM1-24	
LIN Signal	CM1-25	
OUT-7 (Sink 0.3A)	CM1-26	
POWER GND	CM2-1	1.25B
OUT-8 (Sink 3A)	CM2-2	
OUT-9 (Sink 3A)	CM2-3	
OUT-10 (Sink 3A)	CM2-4	
OUT-11 (Sink 3A)	CM2-5	0.85R
M DRIVER2 CW	CM2-6	0.85L
M DRIVER2 CCW	CM2-7	0.85RL
M DRIVER3 CW	CM2-8	0.85LG
M DRIVER3 CCW	CM2-9	0.5OR
IN-10	CM2-10	0.5VB
IN-11	CM2-11	0.5YC
IN-12	CM2-12	
IN-13	CM2-13	
IN-14	CM2-14	
IN-15	CM2-15	
IN-16	CM2-16	
IN-17	CM2-17	0.5RB
SENSOR POWER	CM2-18	0.5RWY
ANALOG IN-1	CM2-19	
ANALOG IN-2	CM2-20	
ANALOG IN-3	CM2-21	
ANALOG IN-4	CM2-22	
ANALOG IN-5	CM2-23	
ANALOG IN-6	CM2-24	0.5RO
IN-18	CM2-25	0.5VB
OUT-12	CM2-26	0.5V
OUT-13	CM2-27	0.5W
OUT-14	CM2-28	0.5LR
OUT-15	CM2-29	0.5SB
OUT-16	CM2-30	
OUT-17	CM2-31	0.5P
OUT-18	CM2-32	
OUT-19	CM2-33	
SENSOR GND	CM2-34	0.5BW

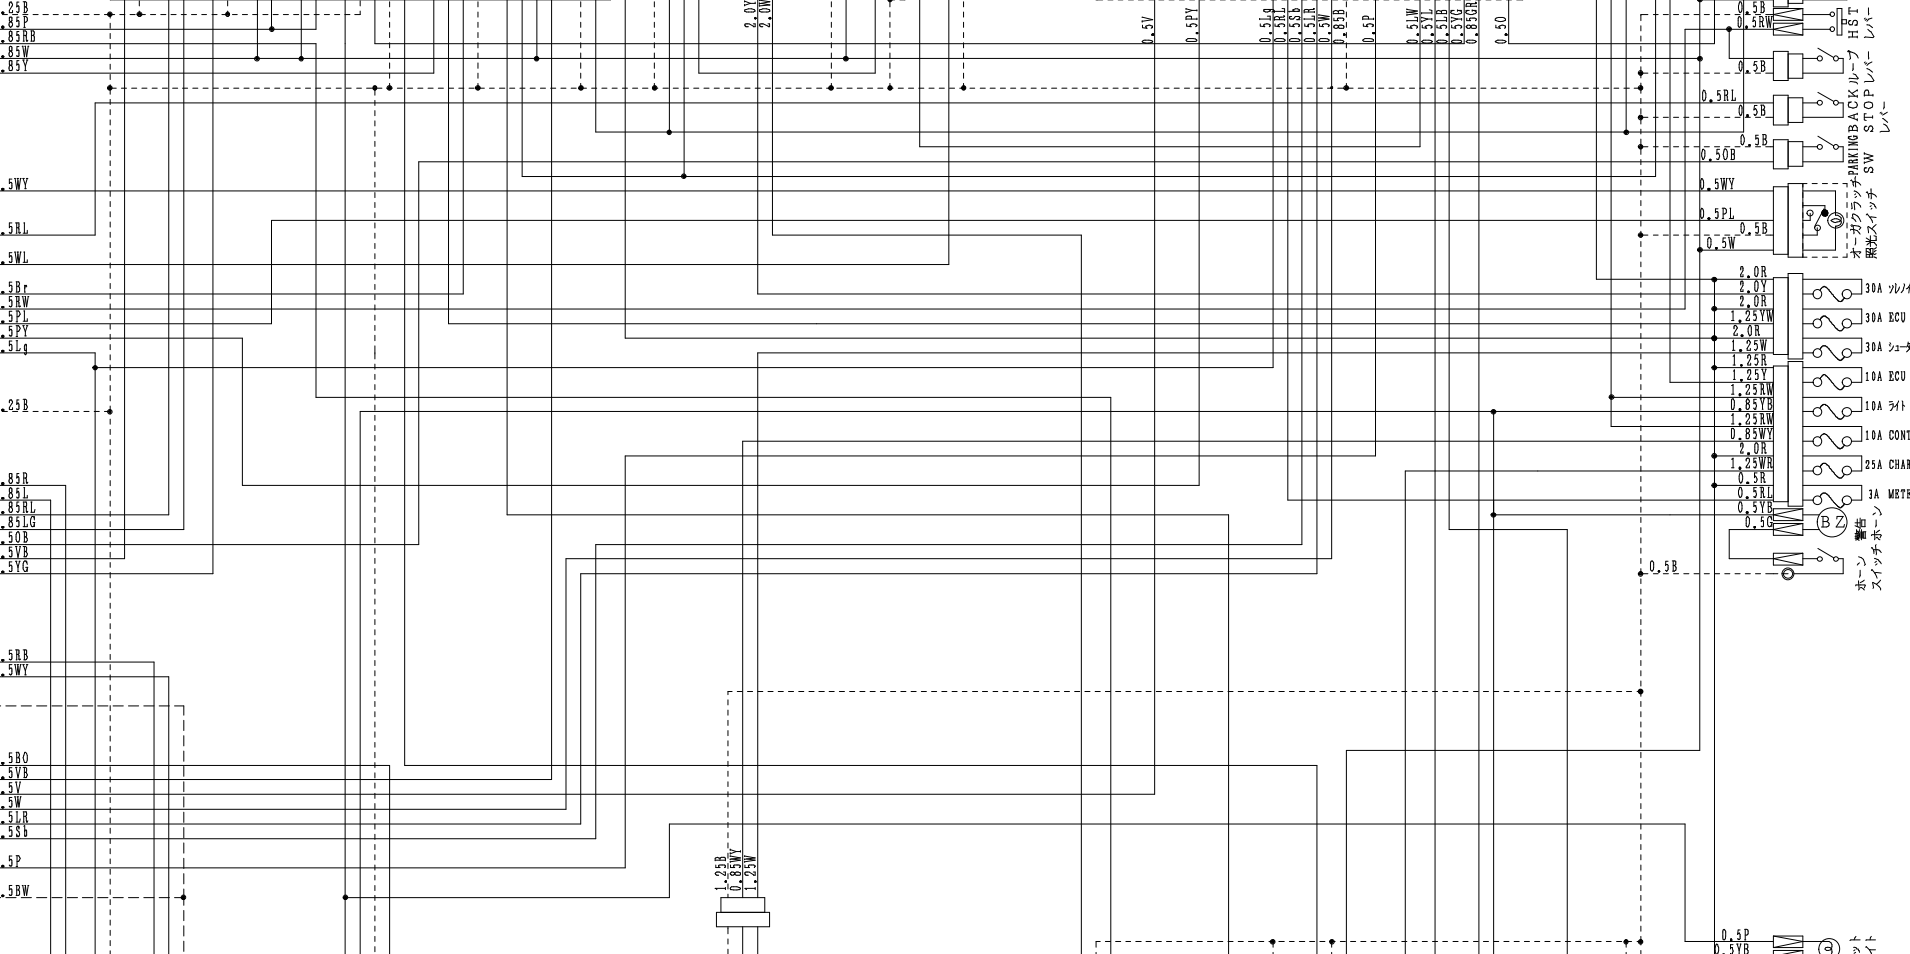

SW 2712 (-S)  
 適用機種 08\*\*\*\*~  
 13\*\*\*\*まで

SW ECU

SIGNAL GND	CM1-1	0.25B
OUT-1 (SINK 5A)	CM1-2	0.85B
OUT-2 (SOURCE 2A)	CM1-3	0.85RB
CONTROL POWER	CM1-4	0.85W
DRIVER POWER	CM1-5	0.85Y
M DRIVER1 CW	CM1-6	
M DRIVER1 CCW	CM1-7	
IN-1	CM1-8	
ANALOG IN-6	CM1-9	
ANALOG IN-7	CM1-10	
OUT-3 (SINK 0.3A)	CM1-11	
OUT-4 (SINK 0.3A)	CM1-12	0.5WY
OUT-5 (SINK 0.3A)	CM1-13	
Rx Data (YTE)	CM1-14	
Tx Data (YTE)	CM1-15	
IN-2	CM1-16	0.5RL
IN-3 CONTROL MON1	CM1-17	0.5WL
IN-4 CONTROL MON2	CM1-18	
IN-5 CONTROL MON3	CM1-19	
OUT-6 (Source 1A)	CM1-20	0.5BR
IN-6	CM1-21	0.5PW
IN-7	CM1-22	0.5PY
IN-8	CM1-23	0.5Lg
IN-9	CM1-24	
LIN Signal	CM1-25	
OUT-7 (SINK 0.3A)	CM1-26	
POWER GND	CM2-1	1.25B
OUT-8 (Sink 3A)	CM2-2	
OUT-9 (Sink 3A)	CM2-3	
OUT-10 (Sink 3A)	CM2-4	
OUT-11 (Sink 3A)	CM2-5	0.85R
M DRIVER2 CW	CM2-6	
M DRIVER2 CCW	CM2-7	0.85L
M DRIVER3 CW	CM2-8	0.85LG
M DRIVER3 CCW	CM2-9	0.5OR
IN-10	CM2-10	0.5VB
IN-11	CM2-11	0.5YG
IN-12	CM2-12	
IN-13	CM2-13	
IN-14	CM2-14	
IN-15	CM2-15	
IN-16	CM2-16	
IN-17	CM2-17	0.5RB
SENSOR POWER	CM2-18	0.5WY
ANALOG IN-1	CM2-19	
ANALOG IN-2	CM2-20	
ANALOG IN-3	CM2-21	
ANALOG IN-4	CM2-22	
ANALOG IN-5	CM2-23	
ANALOG IN-6	CM2-24	
IN-18	CM2-25	0.5BO
OUT-12	CM2-26	0.5V
OUT-13	CM2-27	0.5W
OUT-14	CM2-28	0.5L
OUT-15	CM2-29	0.5SB
OUT-16	CM2-30	
OUT-17	CM2-31	0.5P
OUT-18	CM2-32	
OUT-19	CM2-33	
SENSOR GND	CM2-34	0.5BW

